

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**



Patent Application  
of

KONSTANTINOS POULAKIS

for

Method for Production of a Flexible Shaped Strip) — all caps

## Field of the Invention

The <sup>present</sup> invention relates to a method for producing a flexible shaped strip of plastic material for ~~use in a fixing system which fixes~~ a cushion cover to a cushion component. <sup>includes</sup> The cushion component ~~consisting of~~ a foam ~~material~~ <sup>and</sup> being provided with a longitudinal passage ~~therein~~ for the <sup>ing</sup> engagement of the shaped strip, ~~which, in order~~ <sup>und</sup> to heighten the tear resistance, <sup>the strip</sup> to prohibit tearing of the strip out of the cushion component, <sup>is</sup> provided at least partially, with a slip preventer.

## Background of the Invention

With <sup>the</sup> ~~the~~ method of <sup>disclosed</sup> ~~this type~~ as in DE 198 08 995 C1, a longitudinal passage adapted to the shape of the shaped strip is arranged within the cushion component, <sup>The passage</sup> ~~which~~ has recesses in its longitudinal layout <sup>ing</sup> ~~which serve~~ for the engagement of interlocking elements on the shaped strip. With <sup>is</sup> ~~the~~ known method, the foam material is arranged ~~in such a manner~~ <sup>is</sup> that the cushion component surrounds the shaped strip contiguously, so that beneficial interlocking of the shaped strip in the cushion component is attained. The interlocking forces of the shaped strip in the cushion component are generated essentially through the adhering forces between the surface of the

shaped strip and the associated foam material. Furthermore, to increase the tear resistance of the shaped strip in the foam, with the known solution, it has been suggested to configure the strip of anti-slip components, <sup>configuration</sup> this leads, however, to relatively weak shaped strips and the desired increase of tear resistance forces is not attained at all. Another possibility resides basically in a method for increasing the tear resistance in that a hard foam material is selected for the cushion component. The manufacture of hard foam can generally be attained very simply by variation of the polyhydric alcohol content and the hardener content, as well as their percentage composition in the cushion component material. Hard foam, however, leads to <sup>an undesirable</sup> reduction of the degree of seat comfort, ~~which is undesirable.~~

### Summary of the Invention

~~Starting from this state of the art the object of the invention is to make~~ <sup>present</sup> ~~available~~ <sup>are</sup> a method for the production of a shaped strip <sup>with increased</sup> ~~of which the~~ tear resistance ~~can be notably increased~~ in comparison with the known solutions for shaped strips in cushion components, without ~~leading to~~ <sup>ing</sup> reduction of seat comfort. ~~Such an object is attained by a method having the features found in~~

### Claim 1

Since ~~according to the disclosure part of Claim 1~~ a soft plastic material is used as slip preventer for the shaped strip, serving as the plastic forming the shaped strip, and <sup>since</sup> this slip preventer is applied at least partially on the exterior periphery of the shaped strip, a modification of the surface property is thus attained for the shaped strip, whereby ~~Measurements~~ <sup>Measurements</sup> have shown that the tear resistance forces with this arrangement are notably higher than with comparable methods without anti-slip coating. Therefore, <sup>Because</sup> of the slip prevention provided for the shaped strip, hard plastic materials can be used for the shaped strip, such as high density polyethylene.

Particularly high tear resistance forces can be obtained insofar as, preferably with the method according to the <sup>present</sup> invention for slip prevention, a material is used such as a plastic material <sup>with a</sup> ~~of which the~~ Shore hardness ~~is~~ below 150, preferably 30 to 60, and particularly is 60.

With one particularly preferred embodiment of the method of the <sup>present</sup> invention, the plastic material having anti-slip components is applied ~~by means of~~ extrusion, particularly by ~~means of~~ a coextrusion method, ~~applying the material to the plastic shaped strip~~ Here, the use of EPDM-rubber has <sup>to be</sup> proven particularly favorable.

With another preferred embodiment of the method of the <sup>present</sup> invention, the plastic material having anti-slip components is applied to the shaped strip by ~~means of~~ a hot dipping method. Weakly adhering adhesives on a base of synthetic rubber are particularly to be considered in this case for use as the coating.

In the case of another preferred embodiment of the method of the <sup>present</sup> invention, the anti-slip components <sup>v.g.</sup> plastic material ~~is~~ applied by ~~means of~~ a spray-coating method, ~~being sprayed~~ <sup>by</sup> onto the shaped strip. <sup>By</sup> Using such ~~a~~ method, ~~whereby~~ the layers ~~are~~ <sup>are</sup> applied by spraying <sup>and are</sup> very thin layers one after the other onto the shaped strip, ~~and as~~ <sup>and</sup> coating material, a one-component adhesive based on nitroxyl or nitrous rubber base from an organic solution is preferably used.

In the case of one more preferred embodiment of the method of the <sup>present</sup> invention, the plastic material having anti-slip components is applied by ~~means of~~ a traditional coating or doctoring method, ~~whereby~~ <sup>The</sup> the applied coating is hardened by ~~means of~~ ultraviolet light and/or by an electron

radiation source. The viscosity of the anti-slip components material can be adjusted by addition of a reactive diluting medium.

(A)

~~Hereinafter the method of the invention will be described in greater detail.~~

~~The single drawing shows a representation in principle and not in scale of a section of a seat component.~~

### Detailed Description of the Invention

The fixing system shown in <sup>Fig. 1 is</sup> ~~the drawing serves~~ for a vehicle passenger seat, whereby aircraft passenger seats can also be considered as vehicle passenger seats. The vehicle seat has at least one cushion component 10, arranged for example in the area of either the seat surface or the backrest. Cushion component 10 <sup>is formed</sup> ~~consists~~ of a foamed material, particularly of polyurethane foam. Such foam is configured to be finely porous. A cushion covering 12 <sup>serves for the covering of</sup> ~~serves for the covering of~~ cushion component 10 on its outside facing outward into the environment, which <sup>covering</sup> ~~is shown~~ only diagrammatically in the drawing. <sup>The covering</sup> ~~The covering~~, for example, <sup>is formed</sup> ~~consisting~~ of a fabric or leather material. Cushion covering 12 is pulled tight and anchored to cushion component 10 with formation of an ornamental trim or anchoring seam 14, and <sup>is</sup> ~~is~~ attached by means of a sewn-on seat fastening clip 16 of fabric, fleece, metal gauze,

plastic material or the like, <sup>the</sup> the cushion component is provided with a shaped strip 18 serving as anchoring means.

A longitudinal passage 20 is <sup>formed in</sup> ~~built into~~ the foam material of cushion component 10 to receive shaped strip 18. <sup>The</sup> ~~which~~ passage 20 engages contiguously with shaped strip 18. Shaped strip 18 is held flexibly at least in <sup>its</sup> longitudinal direction, and is formed of plastic material, for example of a soft PVC of Type 740012 of Firma Decelith or of a hard High Density Polyethylene (HDPE), for example of the Type 65428 from Firma Schulmann. Shaped strip 18 has a receiving slot 22, into which is inserted the sewn-on seat fastening clip 16 like a stem or a crosspiece. Cushion covering 12 is tightly articulated with the other end of sewn-on seat fastening clip 16 through a sewn seam or by some adhesive method. Except for that securing point, sewn-on seat fastening clip 16 is configured to be longitudinally flexible, particularly in the direction of lowering the body onto the seat.

An enlargement 24 is provided for receiving ornamental trim seam 14 with sewn-on seat fastening clip 16, <sup>the</sup> the enlargement opening <sup>S</sup> ~~ing~~ outward into the environment and inward into a stem- or crosspiece-like shaped cutout 26,

arranged to receive the passage of sewn-on seat fastening clip 16, <sup>The cutout's</sup> ~~and which~~  
~~with its~~ other end in turn is opened into longitudinal passage 20. Since the  
foam material is compressible within a predeterminable range, shaped strip  
18 can be inserted manually in steps, and ~~also~~ can be removed repeatedly  
from the associated longitudinal passage 20, <sup>for</sup> ~~insofar as~~ material exchange,  
repair or the like ~~is required~~.

The possible depth 28 <sup>at</sup> which the construction is built in, ~~which is~~  
, indicated in the drawing with a double arrow, with modern vehicle seats can  
no longer be varied optionally, since cushion components 10 are configured  
to be quite thin, <sup>As a</sup> ~~with the result that~~ a very thin cross section must also be  
selected for the shaped strip 18, <sup>during use</sup> ~~in order during use to avoid~~ the discomfort  
of sitting down on and feeling the shaped strip ~~which in and of itself is hard~~.  
Since the cross sections for shaped strip 18 must ~~then~~ be of small dimensions  
and can no longer be selected to be of any optional desirable dimensions,  
~~therefore~~ it is necessary, despite the narrowness of shaped strip 18, to anchor  
<sup>the</sup> ~~said~~ strip securely in the foam material, ~~in order~~ to prevent an undesirable  
tearing out, <sup>Undesirable tearing out</sup> ~~which~~ would lead to destruction of cushion covering 12. To  
increase the tear resistance, interlocking configurations 30 can also be  
provided on the exterior periphery of shaped strip 18, as further slip



prevention elements which engage in the foam material, ~~whereby~~ preferably, in this case, the foam material is accessible through corresponding channel-like cutouts. Individual features of such a fastening system ~~are disclosed in~~ ~~can be obtained~~ ~~from~~ DE 198 08 995 C1.

~~In order to~~ <sup>strip</sup> increase the tear resistance for such a solid shaped strip 18, which also can be configured profiled as a hollow chamber, ~~which is (not shown)~~, coatings of anti-slip components ~~which~~ are applied to shaped strip 18 ~~serve~~ <sup>for</sup> to provide <sup>in</sup> this function. The layer thickness of such an anti-slip components material is quite thin, ~~so that~~ <sup>the</sup> ~~for simplified representation~~ <sup>drawing</sup>, it has simply been deleted from the drawing. Particularly, plastic materials ~~have been proven as~~ <sup>are</sup> favorable for use as anti-slip components, ~~forming materials of which the~~ <sup>which</sup> <sup>have a</sup> Shore hardness ~~is~~ <sup>of</sup> lower than 150, preferably between 30 and 60, and particularly preferably ~~is~~ <sup>of</sup> 60. Improved adherence of the foam material to shaped strip 18 having the coating is obtained when soft plastic material is used for the coating. Preferably ~~then~~ the extremely soft plastic is applied by coextrusion in the area of the undercut 32, where the soft plastic engages and from below supports the wing-like widened areas on the top of longitudinal passage 20. As another plastic type, for example EPDM rubber of Firma Macromas can be used. ~~By~~ <sup>as</sup> EPDM rubber is to be understood the

terpolymerization of ethylene and greater portions of propylene as well as a few percentage points of a third monomer rubber with diene structure, in which the diene-monomer provides the required double bonds for a subsequent sulfur vulcanization.

Another possibility for the application of anti-slip components coating is obtained by a hot melt coating method, for example using a weakly adhering adhesive on a base of synthetic rubber, <sup>This coating material</sup> ~~which~~ is widely available, ~~but~~ particularly under the mark 'Lunatack AS 3916' from the H. B. Fuller Company. The processing occurs ~~then~~ through a spray-nozzle or roll application in an atmosphere of 150 to 175° C. The viscosity at 175° C is approximately 14,000 mPas, whereby the softening point is at about 117° C. The viscosity is ~~then~~ <sup>is determined</sup> determined in terms of DIN 53018, ~~and~~ <sup>the</sup> softening point ~~in~~ <sup>is determined</sup> in terms of DIN 52011.

Another method provides a spray coating, whereby very thin layers are generated on shaped strip 18. Preferably, in this case, a one-component special adhesive material on nitrile-rubber-base from an organic solvent is used, for example Type 1475 of Firma Bostik. <sup>is</sup> The ~~aforementioned~~ special adhesive is an adhesive of the type which can also be used as a two-

component adhesive. The adhesive is formed on nitrile rubber base and preferably ketones or esters serve as solvent medium. The viscosity is 3100 mPas.

With one further coating method, a UV-hardenable composition is used, for example 85% Ebecryl 4835 as reactive oligomer, with 15% Ebecryl 111 added thereto as reactive diluting medium for adjustment of the viscosity of the anti-slip components plastic material. The <sup>composition</sup> ~~resulting products~~ can be obtained from Firma UCB.

With the aforementioned application method, the shaped strips can provide conventional fixing systems having remarkably higher tear resistance, so that a secure anchoring of shaped strip 18 in the foam material is guaranteed. Despite increased interlocking forces, shaped strip 18 without any further manipulation can be repeatedly detached from the foam material, which would not be possible if shaped strip 18 were securely cemented in the foam material. Dependent upon the selected combinations of materials, the resulting fixing system can also be disposed of in an environmentally compatible manner or can be recycled.

In the case of one further preferred embodiment of the method of the <sup>present</sup> invention, the anti-slip component plastic material is applied by ~~means of~~ a dipping coating method. In this case, the coating material ~~being used~~ is preferably a one-component adhesive nitril rubber base out of an organic solution. Optionally during the so-called flash-off <sup>time</sup> ~~periods of time~~, the profile is fed through an additional dipping trough, <sup>ing</sup> ~~which~~ contains flakes or clots, <sup>formed</sup> ~~consisting~~ primarily of polyurethane foam or of fibers. Thus, a tight connection of the flakes or clots with the profile is generated for the formation of an anti-slip layer.

③ →

What is claimed a:

Other objects, advantages and salient features of the present invention will become apparent from the following detailed description, which, taken in conjunction with the annexed drawings, discloses preferred embodiments of the present invention.

#### Brief Description Of The Drawings

Referring to the drawings which form a part of this disclosure:

Figure 1 is a side elevational view in section of ~~an apparatus for~~ <sup>a seal component mat</sup> according to ~~a first embodiment of~~ the present invention.

~~Figure 2 is a top plan view in section of the apparatus taken along line A-A of Figure 1;~~

Figure 3 is a side elevational view in section of an apparatus according to a second embodiment of the present invention; and

Figure 4 is a side elevational view in section of an apparatus for according to a third embodiment of the present invention.

While various embodiments have been chosen to illustrate the invention, it will be understood by those skilled in the art that various changes and modifications can be made therein without departing from the scope of the invention as defined in the appended claims.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



(43) Internationales Veröffentlichungsdatum  
10. Mai 2001 (10.05.2001)

PCT

(10) Internationale Veröffentlichungsnummer  
WO 01/32465 A1

(54) Internationale Patentklassifikation<sup>7</sup>: B60N 2/58

(21) Internationales Aktenzeichen: PCT/EP00/09932

(22) Internationales Anmeldedatum:  
10. Oktober 2000 (10.10.2000)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
199 52 416.5 30. Oktober 1999 (30.10.1999) DE

(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme  
von US): GOTTLIEB BINDER GMBH & CO [DE/DE];  
Bahnhofstr. 19, 71088 Holzgerlingen (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): POULAKIS, Kon-  
stantinos [DE/DE]; Länderstrasse 2, 71157 Hildrizhausen  
(DE).

(74) Anwalt: BARTELS UND PARTNER; Lange Strasse 51,  
70174 Stuttgart (DE).

(81) Bestimmungsstaaten (national): CA, JP, US.

(84) Bestimmungsstaaten (regional): europäisches Patent (AT,  
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).


Veröffentlicht:

— Mit internationalem Recherchenbericht.

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD FOR PRODUCTION OF A FLEXIBLE SHAPED STRIP

(54) Bezeichnung: VERFAHREN ZUM HERSTELLEN EINER FLEXIBLEN PROFILLEISTE

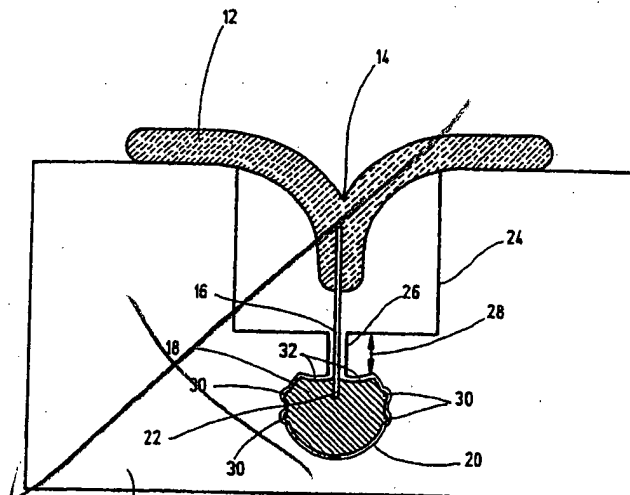

(57) Abstract: The invention relates to a method for the production of a flexible shaped strip (18), which is made of plastic, for a fixing system. Said fixing system serves to fix a cushion cover (12) to a cushion component (10) which consists of a foam material and comprises a longitudinal channel (20) for insertion of the shaped strip (18), with, at least partly, a slip preventer to increase the tear resistance from the cushion component (10). The invention is further characterised by a method for production of a shaped strip with clearly greater tear resistance than for conventional methods, whereby the anti-slip component is made of a plastic softer than that used for the shaped strip (18) and the anti-slip component is, at least partly, arranged around the outer surface of the shaped strip.

[Fortsetzung auf der nächsten Seite]

WO 01/32465 A1